




INNVISION **CS-16K**

// MEDIA SERVER

CS-16K features high-performance hardware for reliable dual 8K video decoding and playback, supporting **eight 4K@60Hz** outputs and pixel-to-pixel display up to **16384×4320@60Hz**. Multi-format content playback, multi-layer composition, scene management, and seamless switching enable flexible control. Functions include screen splitting, irregular

screen mapping, real-time monitoring, HDR processing, arbitrary image rotation, timeline-based editing, and operation via Pad control or third-party devices. Additional capabilities include NDI input, redundancy backup, PVW/PGM monitoring, scheduled operations, logging, and a wide range of visual and transition effects for advanced content presentation.

INNVISION CS-16K

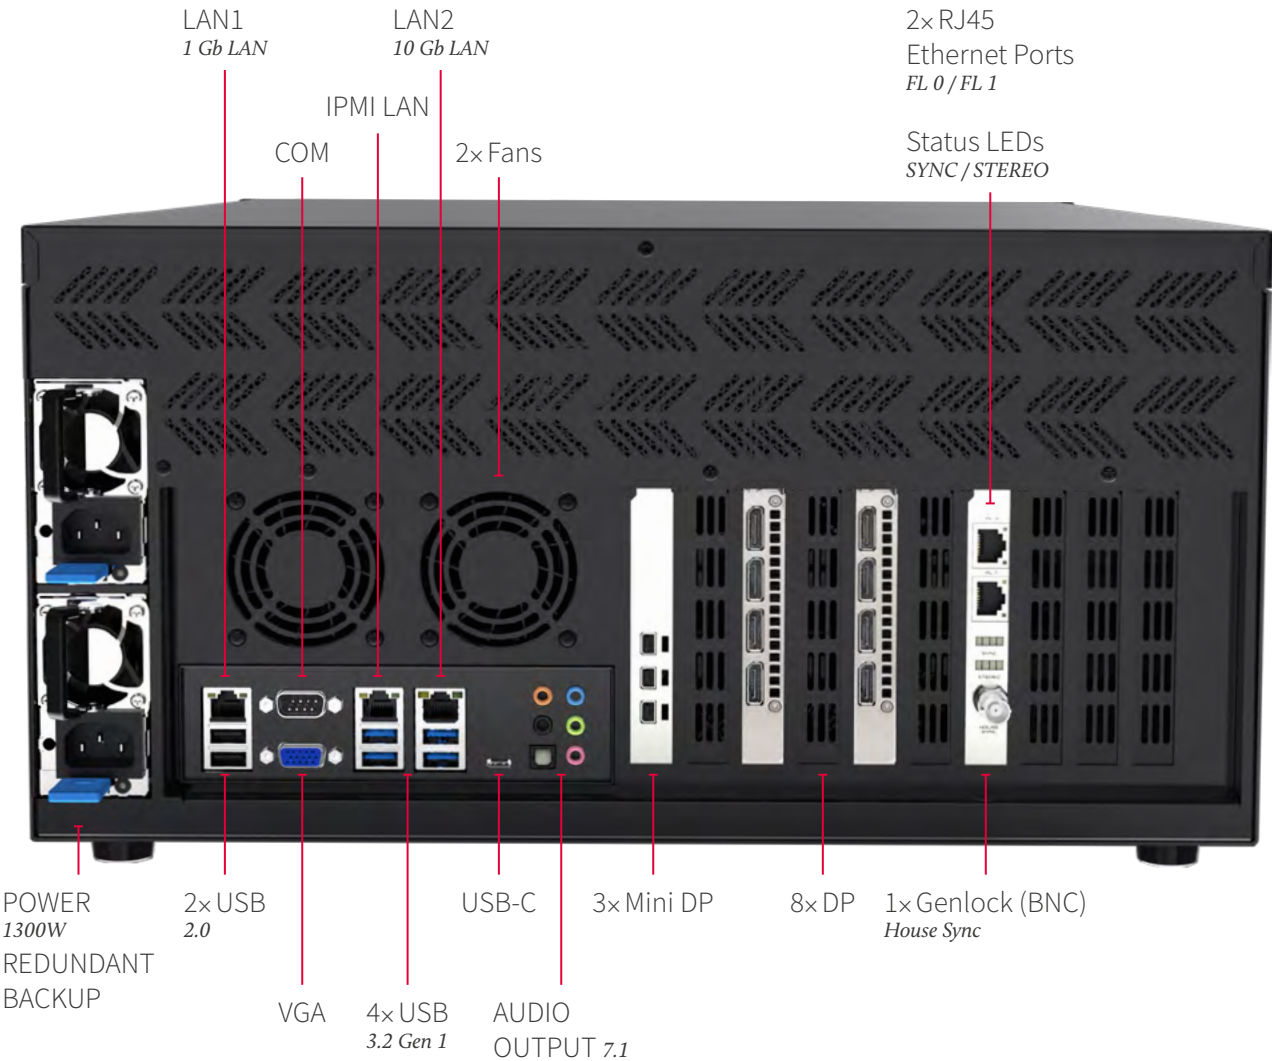

PHYSICAL SPECS

Device dimension WxHxD [mm]	483 × 237 × 577
Weight net. [kg]	20.6

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: CE, FCC, IC, CCC, RoHS

POWER

Power input	200-240V~8A 50/60Hz
Power Cons. [W]	700

ENVIRONMENT

Operating Humidity <i>/non-cond.</i> [RH]	0% - 85%
Operating Temp. Min./Max. [°C]	0 / +55

All data without warranty.