




INNVISION **CS-8K**

// MEDIA SERVER

CS-8K features high-performance hardware for reliable 8K video decoding and playback, supporting **four 4K@60Hz** outputs and pixel-to-pixel display up to **8192×4608@60Hz**. Multi-format content playback, multi-layer composition, scene management, and seamless switching enable flexible control. Functions include screen splitting, custom layouts, real-time

monitoring, HDR 10-bit processing, 3D phase lock, arbitrary image rotation, and operation via front touch panel, MIDI console, or Pad APP. Additional capabilities include NDI and capture card input, redundancy backup, timed operation, and integrated control protocols for playback, switching, and system management.

INNVISION CS-8K

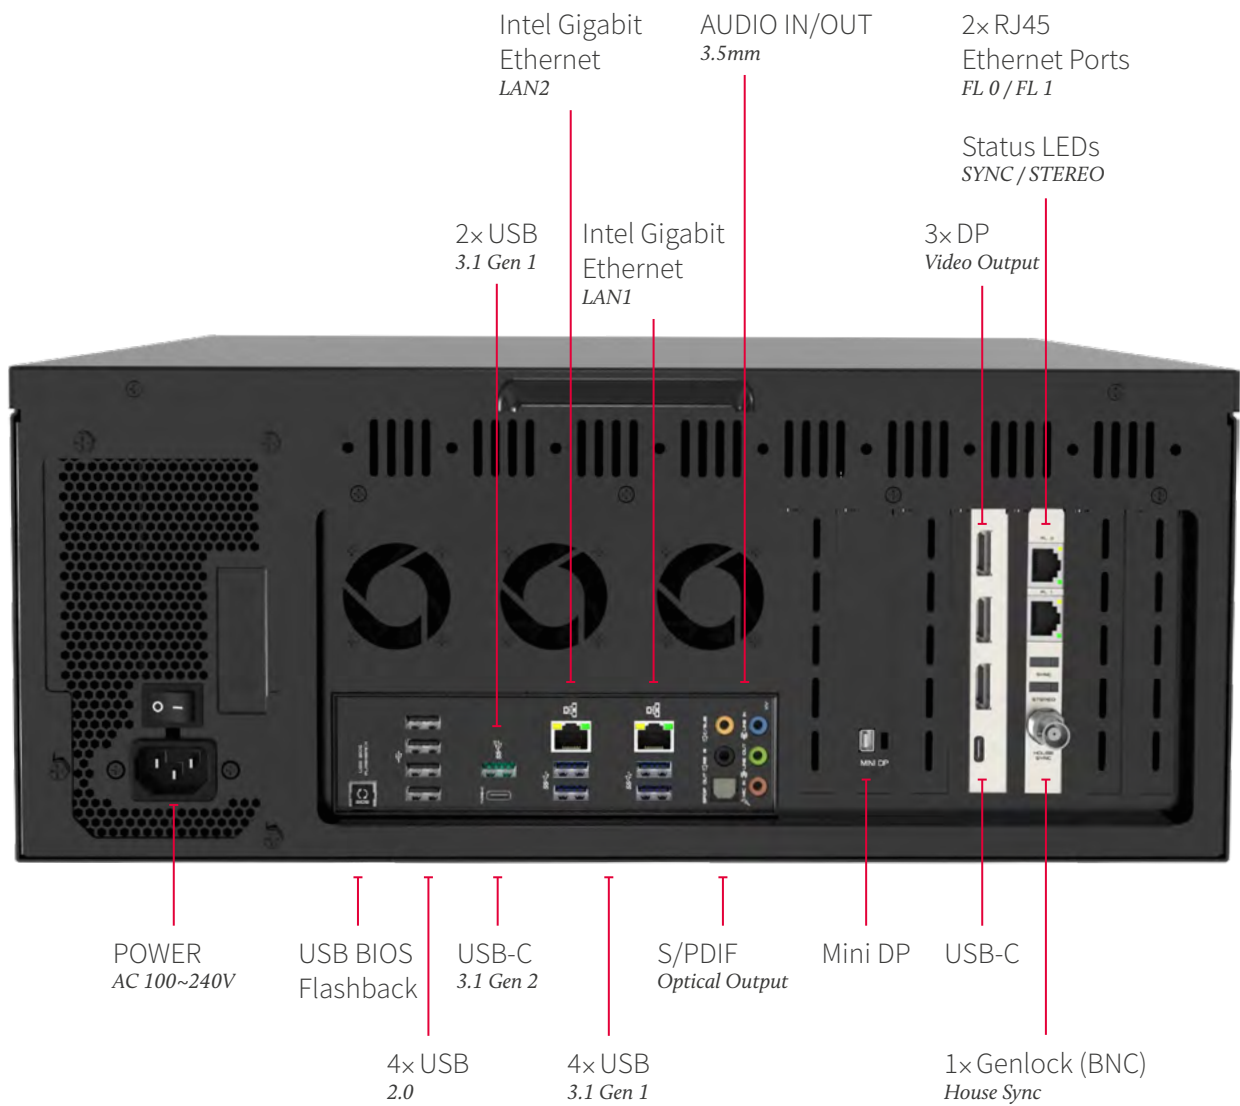

PHYSICAL SPECS

Device dimension WxHxD [mm]	483 × 173.6 × 506.1
Weight net. [kg]	17

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379	
Certificates: CE, FCC, IC, CCC, RoHS	

POWER

Power input	AC100-240V 50/60Hz
Power Cons. [W]	425

ENVIRONMENT

Operating Humidity <i>/non-cond.</i> [RH]	10% - 80%
Operating Temp. Min./Max. [°C]	0 / +45