

# < INNVISION >

## INNVISION **SCXR**



**LCD-SCREEN**  
*Display operation menu  
and system information*

**KNOB**  
*Turning knob  
to select / adjust*

**FUNCTION KEYS**  
OK: *Enter*  
Bright: *Brightness adjustment*  
ESC: *Exit current operation*  
Black: *Black the screen*  
Lock: *Lock front panel keys*  
Freeze: *Freeze the screen*

**MODE KEYS**  
HDMI 1 / DP / HDMI 2 / HDMI 3 / DVI 1 / DVI 2:  
*Set video signal in single-window mode*  
Signal: *View signal status*  
Mode: *Enter/exit scene selection mode*  
1 ~ 7: *Load preset scene in scene selection mode*

**POWER SWITCH** *On/off*

---


### // LED video controller

Controller with **powerful video input** and **high performance processing** capacity.  
Support for **4K inputs** via DP1.2 and HDMI2.0 ports and **2K inputs** via HDMI1.4 and DVI ports. Equipped

with **20x 1G** Ethernet ports and **2x 10G** optical fiber ports. With multiple functions that enable flexible screen control and high-quality image display.

# < INNVISION >

## INNVISION **SCXR**

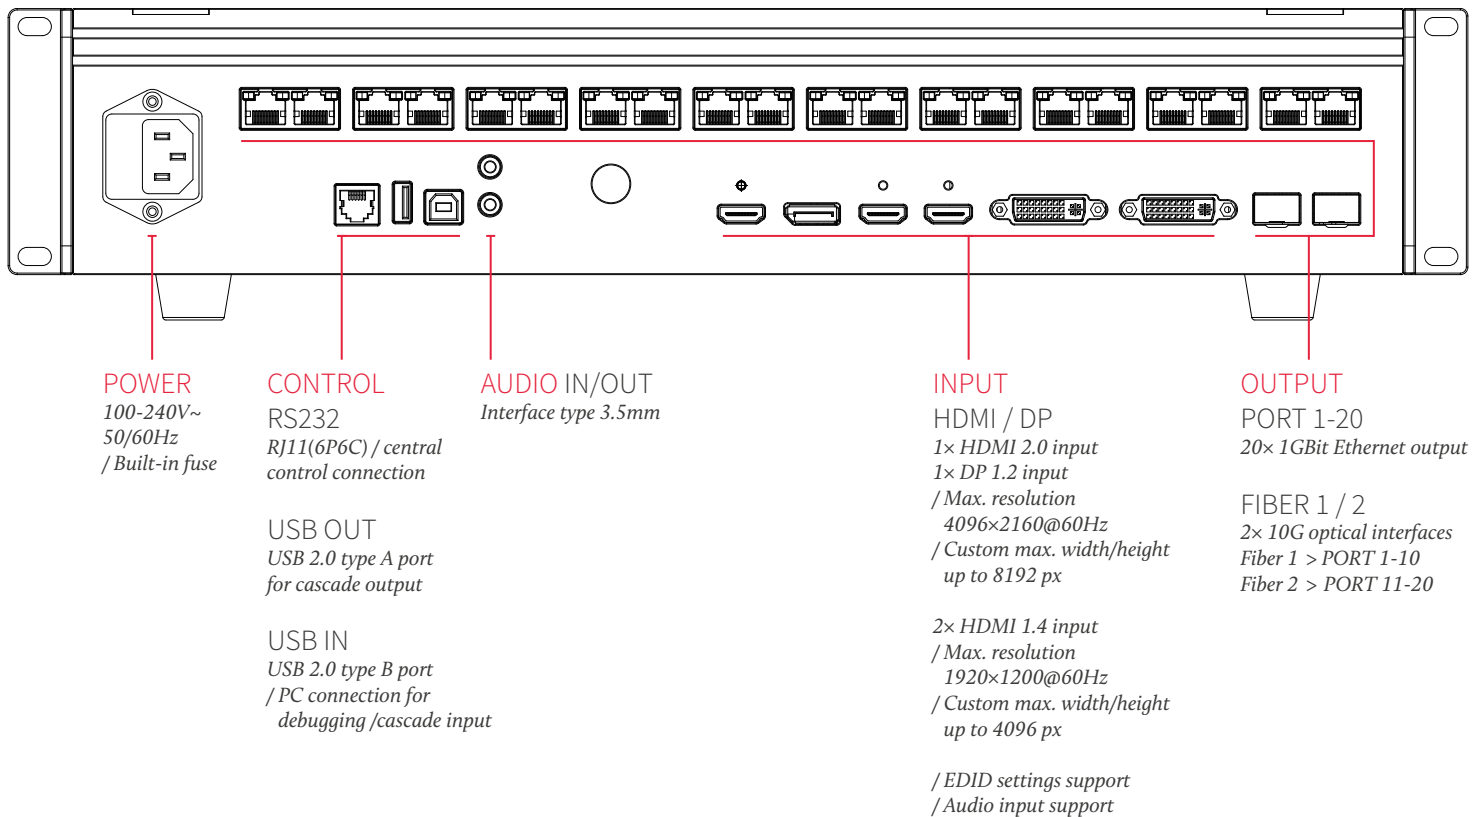

### Physical parameters

|                             |                |
|-----------------------------|----------------|
| Device dimension WxHxD [mm] | 483 x 88 x 414 |
| Weight net. [kg]            | 4.8            |

### INNLIGHTS STANDARDS

|                               |
|-------------------------------|
| WEEE-Reg.-No.: DE 55860379    |
| Certificates:CCC, CE, FCC, IC |

### Electrical parameters

|                 |                    |
|-----------------|--------------------|
| Power supply    | AC100-240V 50/60Hz |
| Rated power [W] | 50                 |

### Environment

|                                    |           |
|------------------------------------|-----------|
| Operating Humidity /non-cond. [RH] | 0% - 80%  |
| Operating Temp. Min./Max. [°C]     | -20 / +60 |