

InnScreen B3

LED FLOOR


[Pixel Pitch 3.9 mm]

// INDOOR LED-FLOOR

Vivid. Robust. Immersive.

Seamless LED floor for immersive 360° experiences, delivering vibrant, high-definition visuals with outstanding durability. Multi-level robust design and advanced impact-resist technology ensure reliable performance and stability under heavy use.

- / Vibrant, high-definition LED floor
- / Immersive 360° experience
- / High contrast / **12000:1**
- / Exceptional viewing angle / **160°**
- / Multi-level robust design
- / LED impact-resist technology / **80-100 N**
- / High load capacity / **4.6 t/m²**

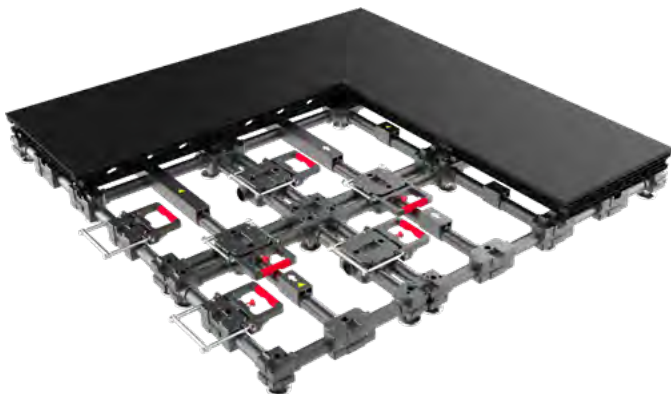

360°
SPACES

InnScreen B3 **LED FLOOR**

PHYSICAL SPECS

Pixel Pitch [mm]	3.9
Load Capacity [kg/m²]	4600
Panel Size [mm]	500 × 500 × 71
Panel Resolution [px]	128 × 128
Weight [kg/Panel]	6.3
Weight [kg/m²]	25.2
Protection Level [Front/Back]	IP 65/54

VISUAL SPECS

Brightness [cd/m²]	3000 - 3500
Viewing Angle Hor/Ver [Deg]	160 / 160
Refresh Rate Min. [Hz]	3840
LED Type	SMD 1516
Contrast Ratio	12000:1
Grey Scale [bit]	16
Video Processing	INNVISION K9+ <i>built on Colorlight</i>



MULTIPLE
FORM OPTIONS



TV
SHOW



GAME
LEAGUE

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Voltage [V]	100 - 240
Power Cons. Max./Avg. [W/m²]	600 / 240

ENVIRONMENT

Operating Humidity [RH]	10% ~ 95%
Operating Temp. Min./Max. [°C]	-20 / +55

All data without warranty.