

Innlights

Displaysolutions

NEW

InnScreen D1 **ROUND CORNER** **5Gbit**

[Pixel Pitch 1.95 mm]

// PRO-GRADE RENTAL / INDOOR

Vivid. Reliable. Rental-Ready.


Mini 4-in-1 LED combining ultra-high refresh rate, wide color gamut, fine grayscale, and high contrast for intense true-to-life visuals. Stable performance with strong impact resistance. Circular assembly.

- / Seamless round corner / **160 mm radius**
- / Cylinder / **ø 320 mm**
- / Mini 4in1 LED
- / Super high refresh rate / **7680 Hz**
- / Color space / **99.9 % DCI-P3**
- / High contrast ratio / **12000:1**
- / High impact resistance / **13 kg/px**
- / **5 Gbit bandwidth transmission**

D1-SERIES: FREELY COMBINABLE

- / D1 / Planar / $\pm 3^\circ$ / $\pm 6^\circ$
- / D1 FLEX / Curved / $\pm 5^\circ$ / $\pm 10^\circ$ / $\pm 15^\circ$ / $\pm 22.5^\circ$
- / **D1 ROUND CORNER** / **160 mm radius**
- / D1 TRIANGLE / Angled edges / 45°
- / D1 ARC / Rounded edges / 500 mm radius
- / D1 CUBE / 90° on all sides / 3D structures

Supports
5G
INNVISION
VIDEO PROCESSING



CYLINDER
ø 320 mm



InnScreen D1 **ROUND CORNER** 5Gbit



PHYSICAL SPECS

Pixel Pitch [mm]	1.95
Brightness a.c. [cd/m ²]	1100
Protection Level	IP 20
Weight [kg/m ²]	18
Weight [kg/Panel]	4.5
Panel Size (outer dimension) [mm]	225 × 500 × 98
Panel Size (LED surface) [mm]	250 × 500
Panel Resolution [px]	128 × 256
Radius [mm]	160
Panel Material	Aluminum

VISUAL SPECS

Viewing Angle Hor/Ver [Deg]	160 / 140
Refresh Rate Min. [Hz]	7680
IC	MBS 7264
Scan	1/16
LED	Interled
LED Type	4in1 SMD
Grey Scale [bit]	16
Color Space	99.9 % DCI-P3
Contrast Ratio	12000:1
Video Processing	INNVISION H5 <i>built on Colorlight</i>

Unit mm
Scale 1:10

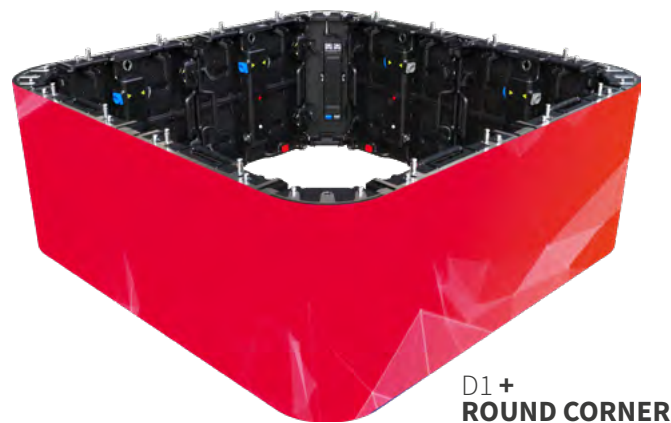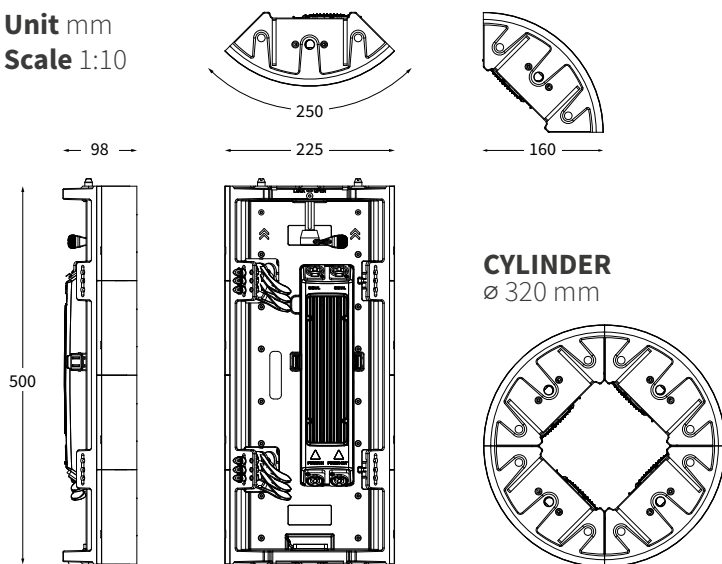

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Voltage [V]	110 - 220
Power Cons. Max./Avg. [W/m ²]	560 / 168

ENVIRONMENT

Operating Humidity [RH]	10% ~ 90%
Operating Temp. Min./Max. [°C]	-20 / +50