

Innlights

Displaysolutions

InnScreen D3 **MAX 5Gbit**

[Pixel Pitch 3.9 mm]

// HIGH DEFINITION RENTAL / INDOOR

Vivid. Versatile. Rental-Ready.

High resolution indoor rental panel with vivid, sharp image quality and flexible screen design. Perfect rental product with magnetic panel system, reinforced corner protection and easy maintenance.

- / Seamless flat
- / Curveable concave/convex / $\pm 3^\circ$ / $\pm 6^\circ$
- / Vivid image experience
- / Magnetic panel system
- / Reinforced corner protection
- / **5 Gbit bandwidth transmission**

D3-SERIES: FULLY CROSS-COMPATIBLE

- / D3 / Seamless flat 0° / $\pm 3^\circ$ / $\pm 6^\circ$
- / **D3 MAX / Seamless flat 0° / $\pm 3^\circ$ / $\pm 6^\circ$**
- / D3 ROUND CORNER / 160 mm radius

Supports
5G
INNVISION
VIDEO PROCESSING



Innlights

Displaysolutions

InnScreen D3 **MAX** 5Gbit

PHYSICAL SPECS

Pixel Pitch [mm]	3.9
Panel Size [mm]	500 × 1000 × 71
Panel Resolution [px]	128 × 256
Weight [kg/m²]	24
Weight [kg/Panel]	12
Curving [deg]	-6° / -3° / 0° / +3° / +6°
Minimum Radius [m/Panel]	4.77 / 60
Protection Level [Front/Back]	IP 20
Panel Material	Die-cast aluminum

ROUND /
SHARP
CORNERS




INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

VISUAL SPECS

Brightness [cd/m²]	1000
Refresh Rate Min. [Hz]	3.840
Viewing Angle Hor/Ver [Deg]	160 / 140
Scan	1 / 16
IC Driver	MBI 5253
LED	Sinyopto [copper]
LED Type	SMD 2121
Contrast Ratio	4000:1
Grayscale Max. [bit]	14

Video Processing **INNVISION H5**
built on Colorlight

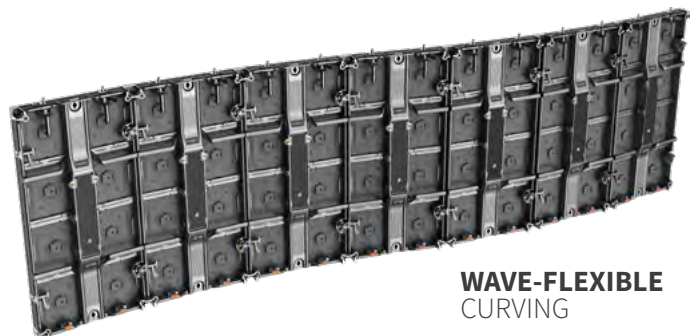

WAVE-FLEXIBLE
CURVING

POWER

Voltage [V]	110 - 220
Power Cons. Max./Avg. [W/m²]	450 / 135

ENVIRONMENT

Operating Humidity [RH]	10% ~ 55%
Operating Temp. Min./Max. [°C]	-20 / +40