

Innlights

Displaysolutions

InnScreen D3 **5Gbit** **ROUND CORNER**

[Pixel Pitch 3.9 mm]

// HIGH DEFINITION RENTAL / INDOOR

Vivid. Versatile. Rental-Ready.


High resolution indoor rental panel with vivid, sharp image quality and flexible screen design. The round corner panel of the D2-series enables advanced 3D setups with a smooth radius.

- / Seamless round corner / **160 mm radius**
- / Cylinder / **ø 320 mm**
- / Vivid image experience
- / Magnetic panel system
- / Reinforced corner protection
- / **5 Gbit bandwidth transmission**


D3-SERIES: FULLY CROSS-COMPATIBLE

- / D3 / Seamless flat 0° / ± 3° / ± 6°
- / D3 MAX / Seamless flat 0° / ± 3° / ± 6°
- / **D3 ROUND CORNER / 160 mm radius**

Supports
5G
INNVISION
VIDEO PROCESSING



CYLINDER
ø 320 mm

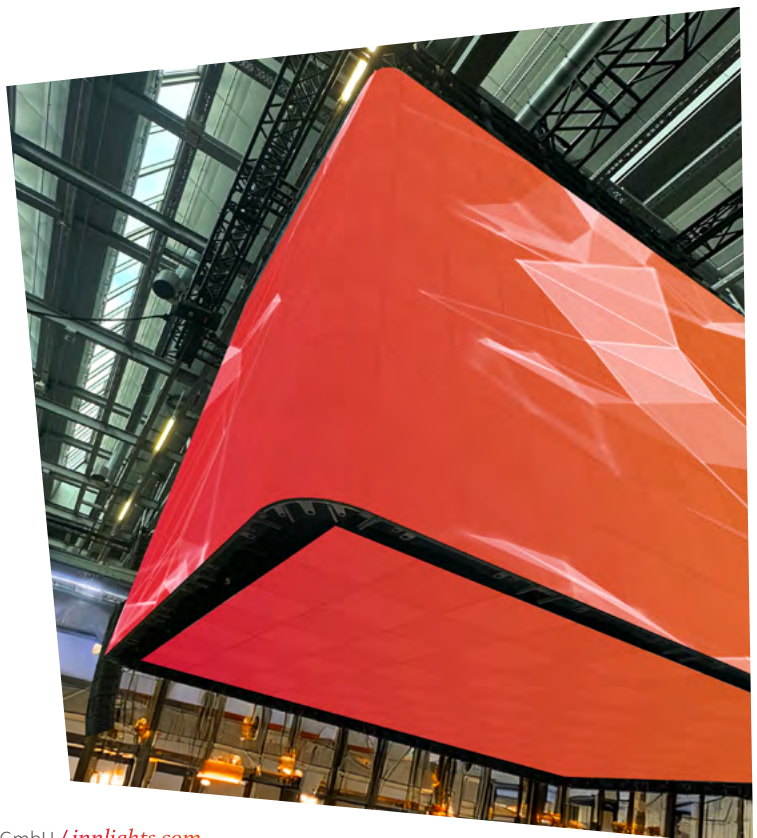


InnScreen D3 **ROUND CORNER** 5Gbit

PHYSICAL SPECS


Pixel Pitch [mm]	3.9
Weight [kg/m²]	34
Weight [kg/Panel]	8.5
Panel Size (outer dimension) [mm]	225 × 500 × 98
Panel Size (LED surface) [mm]	250 × 500
Panel Resolution [px]	128 × 128
Protection Level [Front/Back]	IP 20
Panel Material	Die-cast aluminum

Unit mm
Scale 1:10

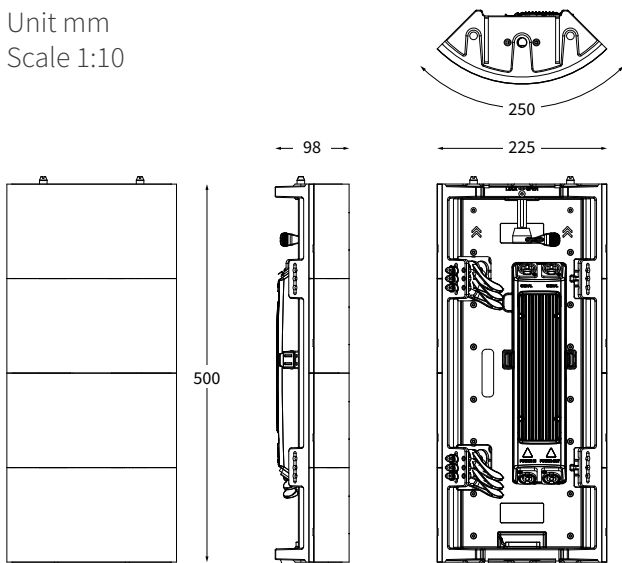

VISUAL SPECS

Brightness [cd/m²]	1000
Refresh Rate Min. [Hz]	3.840
Viewing Angle Hor/Ver [Deg]	160 / 140
Scan	1 / 16
IC Driver	MBI 5253
LED	Sinyopto [copper]
LED Type	SMD 2121
Contrast Ratio	4000:1
Grayscale Max. [bit]	14
Video Processing	INNVISION H5 <i>built on Colorlight</i>

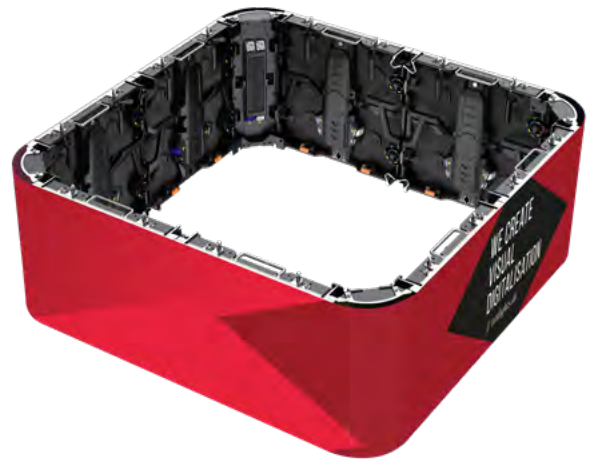

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Voltage [V]	110 - 220
Power Cons. Max./Avg. [W/m²]	450 / 135

ENVIRONMENT

Operating Humidity [RH]	10% ~ 55%
Operating Temp. Min./Max. [°C]	-20 / +40