

Innlights

Displaysolutions

NEW

InnScreen H3

[Pixel Pitch 3.91 mm]

// ULTRA-TRANSPARENT / INDOOR


Transparent. Seamless. True-to-Life.

Transparent, almost invisible LED screen with vibrant, high-definition visuals and > 92 % transparency.

Lightweight aluminum construction with a minimalist, ultra-thin yet robust frame. Plug-and-play operation with content control via PC or mobile, wired or wireless.

Suitable for hanging or standing installation.

- / Vibrant, high-definition visuals
- / Unique transparency / > 92 %
- / Extremely thin / **1.8 mm**
- / Ultra light / < 8 kg/m²

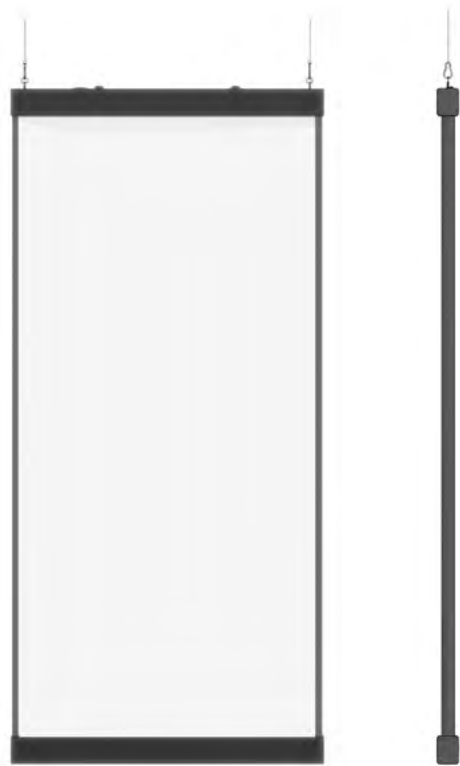

SETUP
RETAIL



Innlights

Displaysolutions

InnScreen H3 **NEW**

PHYSICAL SPECS

Pixel Pitch [mm]	3.91
Visual Transparency	> 92 %
Module Thickness [mm]	1.8
Total Thickness [mm]	55
Screen Weight [kg/m²]	7,96

VISUAL SPECS

Brightness [cd/m²]	3000 - 3500
Viewing Angle Hor/Ver [Deg]	160 / 140
LED Type	Light & Driver Integrated
Grey Scale [bit]	16
Video Processing	INNVISION



**FASHION
STORE**

**TRAIN
STATION**



INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Voltage [V]	110 - 220
Power Cons. Max./Avg. [W/m²]	1600 / 640

ENVIRONMENT

Operating Humidity [RH]	10% ~ 85%
Operating Temp. Min./Max. [°C]	-20 / +60