

Innlights

Innlights^{TC} Displaysolutions

NEW

InnScreen I-Series

[Pixel Pitch 35 mm]

// Flexible & transparent
OUTDOOR LED-screen


High brightness and waterproof LED-screen for curved, folded or rolled installation.

- / **Soft & flexible**
- / **Over 85% high transparency**
- / **High brightness**
- / **Ultra thin and light weight**
- / **Waterproof and wind-permeable**
- / **Fast Installation with patented magnet buckle**
- / **Energy-saving**

InnScreen features:

- / Super flexibility
- / Transparent panel with wind permeability
- / Ultra light weight
- / Fast installation

FLEXIBLE
TRANSPARENT
LIGHTWEIGHT

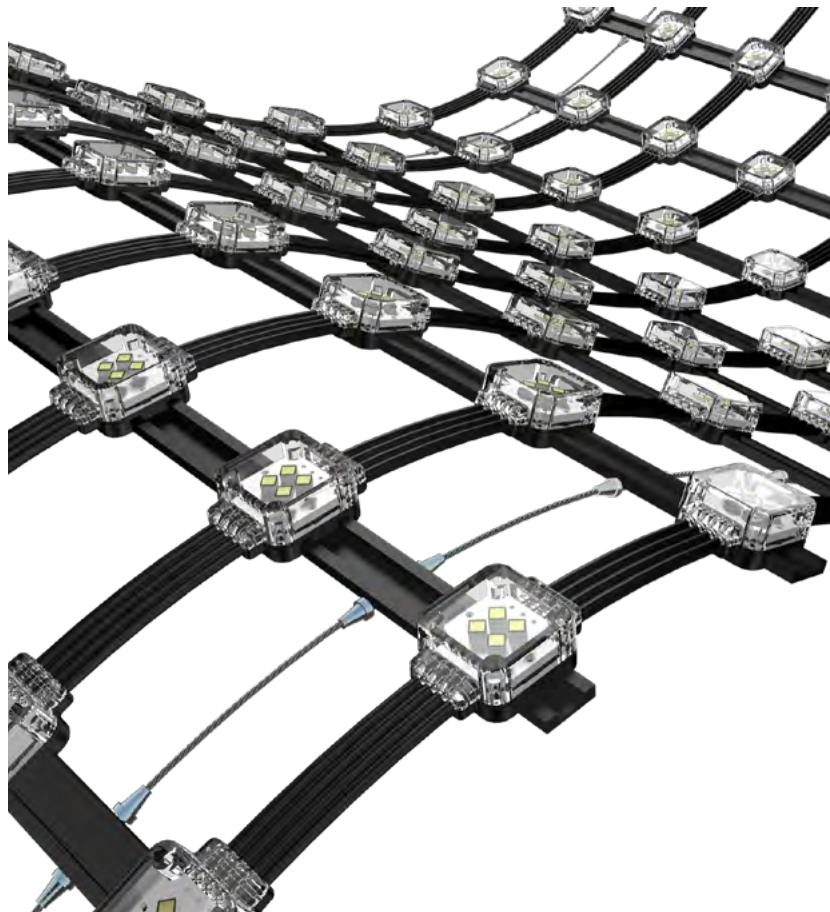



Innlights^{TC}
Displaysolutions


InnScreen I35 **NEW**

Physical Facts


Pixelpitch [mm]	35
Brightness [cd/m ²]	2.000
Protection Level [Front/Back]	IP 66
Weight [kg/m ²]	8,2
Panel Size [mm]	280 x 1.995
Panel Resolution [px]	8 x 57
Pixel Density [px/m ²]	816
Transparency [%]	44

Optical Facts

Viewing Angle Hor/Ver [Deg]	120 / 120
Refresh Rate Min. [Hz]	3.840
IC Driver	MBI 5251
LED	Nationstar [Gold]
LED Type	SMD 3535
Processing [bit]	12
Video Processing	InnVision

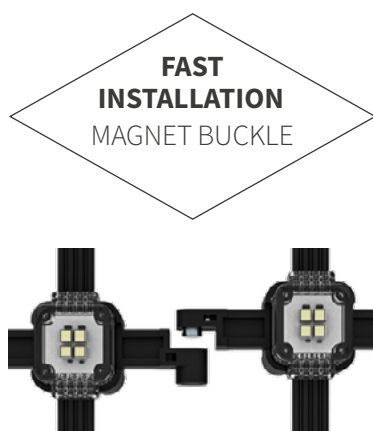

TRANSPARENCY with HIGH WIND RESISTANCE

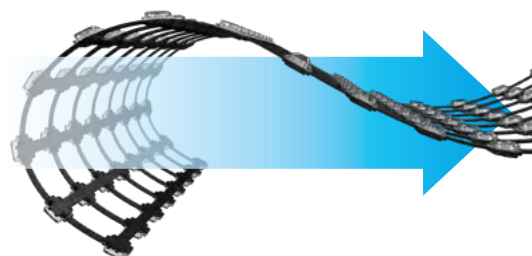

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

Power Supply

Input Voltage [V]	100 - 240
Wattage Avg./Max. [W /m ²]	120 / 360

Environment

Operating Humidity [RH]	10% - 90%
Operating Temp. Min./Max. [°C]	-20 / +60