

InnScreen Perimeter **F6P**

[Pixel Pitch 6.67 mm]

// OUTDOOR ARENA PERIMETER SYSTEM
WITH EMERGENCY GATE

Vivid. Robust. Reliable.

*Stadium perimeter screen with sharp, realistic, interference-free image and high reliability. Corner protection and internal wiring for save operating. Protective features.
With emergency gate.*

- / High brightness / **6000 cd/m²**
- / Super-high reliability
- / Fireproof / **5 VB**
- / Emergency gate




FIRE CLASS



InnScreen Perimeter **F6P**

PHYSICAL SPECS

Pixel Pitch [mm]	6,67
Brightness [cd/m²]	6000
Protection Level [Front/Back]	IP 66/65
Panel Size 1 [mm]	800 × 900
Panel Size 2 [mm]	1600 × 900
Panel Weight 1 [kg]	40
Panel Weight 2 [kg]	62
Panel Depth [mm]	90
Panel Material	Aluminum

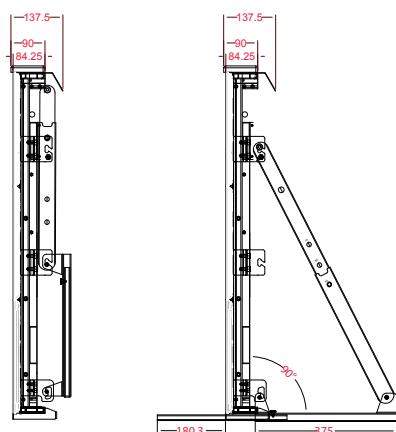

mm / 1:20 / side view

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379


Certificates: TUV CE, EMC CE (EMV)

VISUAL SPECS

Viewing Angle Hor/Ver [Deg]	170 / 110
Refresh Rate Min. [Hz]	3.840
Driver IC	ICN 2153S
LED Type	SMD 2727
LED	Nationstar [copper]
Processing [bit]	16
Video Processing	INNVISION K9+ <i>built on Colorlight</i>



**EMERGENCY
GATE**

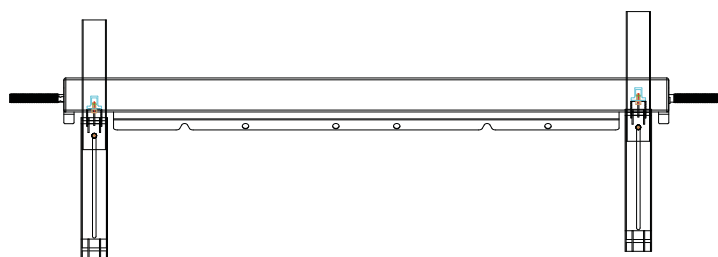

POWER

Voltage [V]	100 - 240
Power Cons. Max./Avg. [W/m²]	495 / 175

ENVIRONMENT

Operating Humidity [RH]	10% - 90%
Operating Temp. Min./Max. [°C]	-20 / +60