

InnScreen S **MAX** -Series

[Pixel Pitch 2,6 mm]

// Super High Definition /
Rental & Fixed-Installation Indoor

Stunning image performance for rental or fixed installation. Perfect flatness with die-cast aluminum cabinets and ultra-flat 33 mm wall mounting.



- / **Maximum variability for fixed installation or rental**
- / **Ultra-thin 33 mm**
- / **90° corner**
- / **Limitless installation options**

Easy service and maintenance with magnetic mounting.

6 panel sizes freely combinable.

InnScreen features:

- / Super high pixel pitch for fixed or rental indoor installation
- / Maximum variability
- / Full front service
- / Ultra-flat direct wall mounting
- / 6 panel sizes with free combination

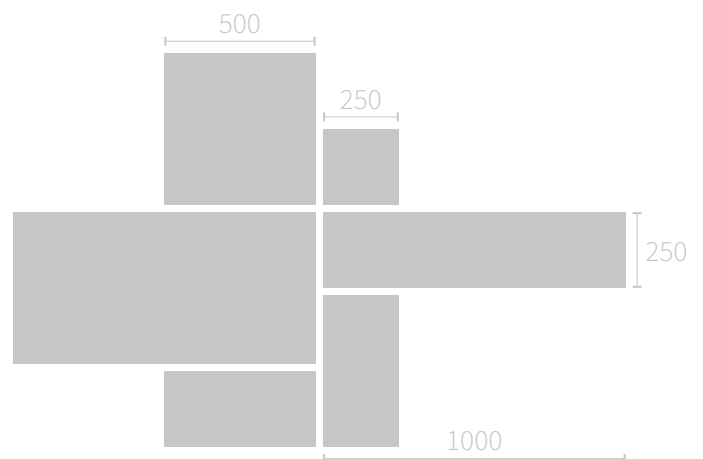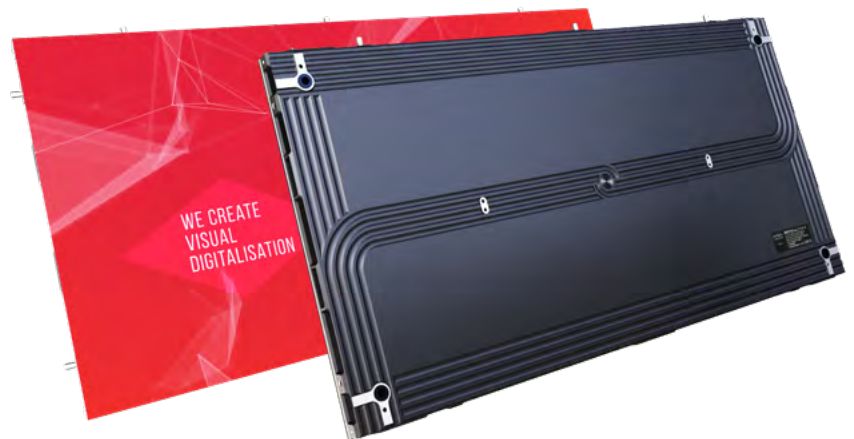

InnScreen S2 **MAX**

Physical Facts

Pixelpitch [mm]	2,6
Brightness [cd/m²]	800 - 1.000
Protection Level [Front/Back]	IP 20
Weight [kg/m²]	20
Pixel Density [px/m²]	147.456
Panel Depth [mm]	33,4
Material	Aluminum


Optical Facts

Viewing Angle Hor/Ver [Deg]	160 / 140
Refresh Rate Min. [Hz]	3.840
IC Driver	MBI 5253
LED	Sinyopto [copper]
LED Type	SMD 1515
Processing [bit]	14
Video Processing	InnVision K9+

6 Panel Sizes freely combinable

Panel Size 1 [mm]	1000 x 500
Resolution [px]	384 x 192
Panel Size 2 [mm]	500 x 500
Resolution [px]	192 x 192
Panel Size 3 [mm]	250 x 500
Resolution [px]	96 x 192

Panel Size 4 [mm]	1000 x 250
Resolution [px]	384 x 96
Panel Size 5 [mm]	500 x 250
Resolution [px]	192 x 96
Panel Size 6 [mm]	250 x 250
Resolution [px]	96 x 96

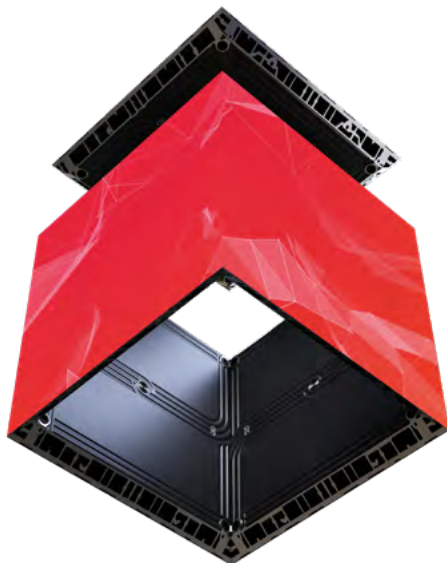

for **maximum** variability

Power Supply

Input Voltage [V]	100 - 240
Wattage Max./Avg. [W /m²]	420 / 126

Environment

Operating Humidity [RH]	10% ~ 95%
Operating Temp. Min./Max. [°C]	-20 / +50

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)