

InnScreen S2

[Pixel Pitch 2.6 mm]

// SUPER HIGH DEFINITION
FIXED-INSTALLATION / INDOOR


Ultra-HD. High-Performance. Reliable.
*Most reliable super-high definition fixed
installation panel with brilliant video
performance.*

*Light profile. Front service through magnetic
design with push & pull function.
Ultra-flat direct wall mounting.*

3 panel sizes freely combinable.

INNSCREEN FEATURES:

- / Super high Pixel Pitch for fixed indoor installation
- / Black face SMD
- / Full front service
- / Ultra-flat direct wall mounting
- / 3 panel sizes with free combination

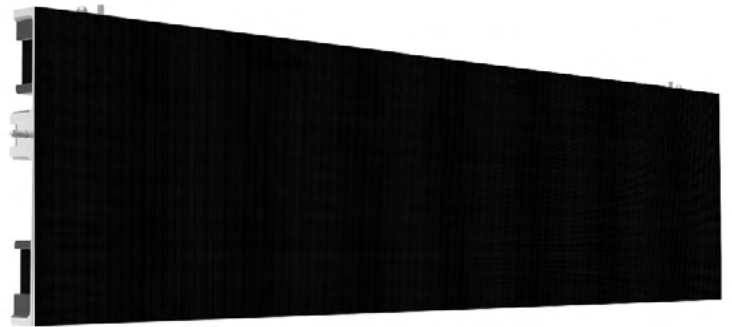

InnScreen S2

PHYSICAL SPECS


Pixel Pitch [mm]	2,6
Brightness [cd/m²]	1.000
Protection Level [Front/Back]	IP 20
Weight [kg/m²]	27,2
Pixel Density [px/m²]	147.456
Panel Depth [mm]	42

VISUAL SPECS

Viewing Angle Hor/Ver [Deg]	160 / 140
Refresh Rate Min. [Hz]	3.840
IC Driver	ICN 2153
LED	Nationstar [gold]
LED Type	SMD 2121
Processing [bit]	14
Video Processing	INNVISION K5+ <i>built on Colorlight</i>

3 COMBINABLE PANEL SIZES

Panel Size 1 [mm]	500 × 250 × 42
Resolution [px]	192 × 96
Panel Size 2 [mm]	750 × 250 × 42
Resolution [px]	288 × 96
Panel Size 3 [mm]	1000 × 250 × 42
Resolution [px]	384 × 96

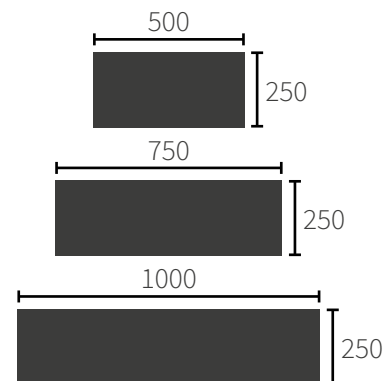

INNLIGHTS STANDARDS

WEEE-Reg. -No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Voltage [V]	100 - 240
Power Cons. Max./Avg. [W/m²]	440 / 170

ENVIRONMENT

Operating Temp. Min./Max. [°C]	-20 / +45
--------------------------------	-----------