

POP-UP

DIGITAL MOTION CUBE 2M

[Pixel Pitch 2.9 mm]


- // LED-SCREEN IN A NEW DIMENSION
- / OUTDOOR / **FIRE SAFETY**

*LED cube for outstanding 3D effects.
A unique screen concept with a modular system
for temporary and permanent installations.
Content playback via cloud control.
With E-Bulb – the integrated fire extinguisher
meeting the highest fire safety requirements.*

- / High resolution / Black-Face SMD
- / Pop-up installation
- / High fire resistance + fast heat dissipation
- / **E-Bulb fire extinguisher**




FIRE PROTECTION
CLASSIFICATION



FIRE
EXTINGUISHER

Screen resolution per side W × H [px]	756 × 672
Total screen resolution W × H [px]	3024 × 672
Screen size per side W × H [m]	2,25 × 2
Total screen area W × H [m²]	18
Overall dimensions W × D × H [m]	2,32 × 2,32 × 2,15
Total weight [kg]	850
Footprint [m²]	5,35
Material	InnScreen LM2.9 FE / Aluminum construction
Connection data	12 kW (32 A CEE red connector)

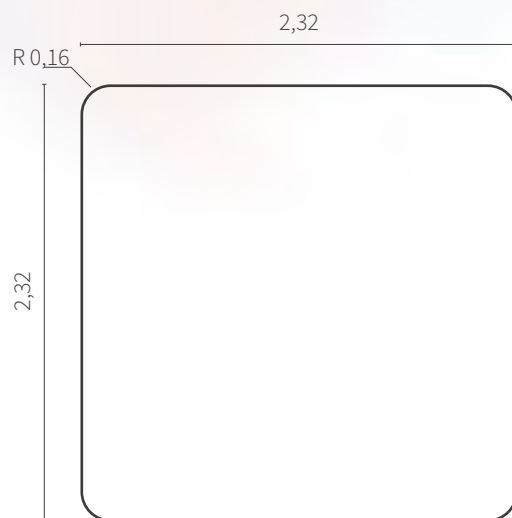


Top / Unit: m / 1:40

InnScreen LM2.9 **FE**

PHYSICAL SPECS

Pixel Pitch [mm]	2.97
Brightness [cd/m ²]	2500 - 3000
Protection Level [Front/Back]	IP 66
Weight [kg/m ²]	38
Panel Depth [mm]	81
Panel Material	Aluminum
Module Material	Aluminum

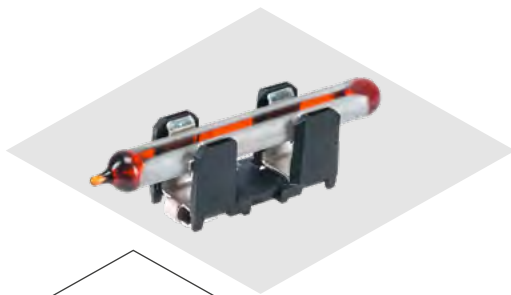

E-BULB
FIRE EXTINGUISHER

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

VISUAL SPECS

Viewing Angle Hor/Ver [Deg]	160 / 90
Refresh Rate Min. [Hz]	3840
LED	Sinyopto [COPPER]
LED Type	SMD1515 [BLACK LED]
Processing [bit]	14 - 16
Video Processing	INNVISION K9+



POWER

Voltage [V]	100 - 240
Power Cons. Max./Avg. [W/m ²]	500 ±3% / 150

ENVIRONMENT

Operating Humidity [%RH]	10 - 90
Operating Temp. Min./Max. [°C]	-40 / +55