

POP-UP DIGITAL MOTION TOWER 4S

[Pixel Pitch 3.9 mm / 4 Sides – 1.75m × 4m]

// NEXT-DIMENSION LED SCREEN / 4-SIDED
OUTDOOR


Deep. Immersive. Pop-Up.

4-sided LED tower for striking 3D effects. Modular screen system for temporary or permanent installations. Cloud-based control.

- / 4-sided LED screen
- / 3D depth effect
- / True-to-life visuals
- / Flat or 3D cube playback
- / Fast pop-up setup



Total screen resolution W × H [px]	1792 × 1024
Screen resolution per side W × H [px]	448 × 1024
Total screen size W × H [m]	7 × 4
Screen size per side W × H [m]	1,75 × 4
Total dimension W × D × H [m]	1,82 × 1,82 × 4,10
Total weight [kg]	960
Base area [m²]	3,3
Material	InnScreen LM3.9 MAX / aluminum structure
Connection data	16,8 kW (32 A CEE red connection)

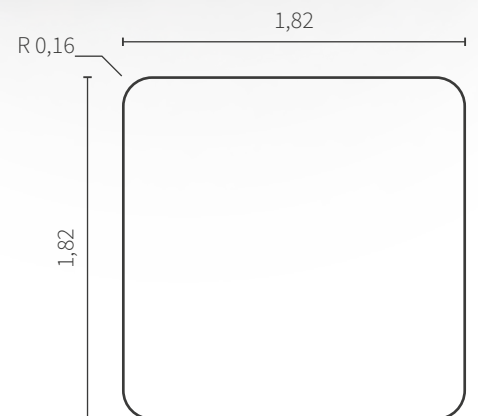

1:40 / top view

InnScreen LM3 MAX

PHYSICAL SPECS

Pixel Pitch [mm]	3.91
Panel Size [mm]	1500 × 1000 × 81.5
Panel Resolution [px]	384 × 256
Weight [kg/m²]	27
Weight [kg/Panel]	41
Protection Level [Front/Back]	IP 66
Panel Material	Die-cast aluminum

VISUAL SPECS

Brightness [cd/m²]	5000 - 5500
Refresh Rate Min. [Hz]	7680
Viewing Angle Hor/Ver [Deg]	160 / 90
Scan Method	1 / 16
IC Driver	MBS 7253
LED Type	SMD 1935
Contrast Ratio	13000:1
Grayscale Max. [bit]	14 - 16
Video Processing	INNVISION K10 <i>built on Colorlight</i>



INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Power Max./Avg. [W/m²]	600 / 210
Voltage [V]	100 - 240

ENVIRONMENT

Operating Humidity [RH]	10%~95%
Operating Temp. Min./Max. [°C]	-40 / +55