

Innlights

Displaysolutions

InnScreen Y5

[Pixel Pitch 5.95 mm]

// RENTAL OUTDOOR

High resolution outdoor rental panel with great image brilliance and limitless screen design:

- / **Seamless flat**
- / **Convex curved:** 0° / + 2.5° / + 5° / + 7.5° / + 10°
- / **Concave curved:** 0° / - 2.5° / - 5° / - 7.5° / - 10°
- / **90° corner**
- / **Cube**

INNSCREEN FEATURES:

- / Outdoor rental panel with high definition
- / Curved screen
- / Special panel for gap-free 90° corner
- / Fast installation
- / Easy maintenance
- / Free combination with InnScreen X-Series



INNSCREEN X5
CONNECTABLE



CONCAVE
CONVEX



InnScreen Y5

PHYSICAL SPECS

Pixel Pitch [mm]	5,95
Brightness [cd/m ²]	5.000
Protection Level [Front/Back]	IP 65 / IP 54
Weight [kg/m ²]	27
Panel Size [mm]	500 × 1.000 × 90
Panel Resolution [px]	84 × 168
Pixel Density [px/m ²]	28.224
Panel Material	Die casting Aluminum


VISUAL SPECS

Viewing Angle Hor/Ver [Deg]	160 / 160
Refresh Rate Min. [Hz]	3.840
IC Driver	MBI 5253
LED	Nationstar [Gold]
LED Type	SMD 1921
Contrast Ratio	3000:1
Processing [bit]	14 - 18
Video Processing	INNVISION i9+ <i>built on Colorlight</i>

Connectable *with*
InnScreen X-Series

1 Module - 2 Panel Sizes

500 × 500 mm
500 × 1000 mm

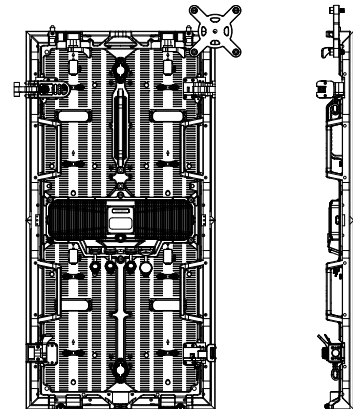

M. 1:20

INNLIGHTS STANDARDS

WEEE-Reg.-No.: DE 55860379
Certificates: TUV CE, EMC CE (EMV)

POWER

Voltage [V]	100 - 240
Power Cons. Max./Avg. [W/m ²]	650 / 325

ENVIRONMENT

Operating Humidity [RH]	10% - 90%
Operating Temp. Min./Max. [°C]	-20 / +40